



Portable Generators

AVR/50Hz

OPEN FRAME TYPE  
**DAISHIN GENERATOR**  
**SGA & SGB SERIES**

POWERED by **HONDA**™



SGB3001Ha

SGB7001Ha with  
Wheels/ Hanging holder option

**MADE IN JAPAN**  
DAISHIN INDUSTRIES LTD.

with HONDA OHV Engine

# OPEN FRAME TYPE DAISHIN GENERATOR



SGA3001Ha

Max. Output  
2.2kVA



SGB3001Ha

Max. Output  
2.2kVA

- OHV 4-stroke engines HONDA GX series.
- Well designed control panel for easy operation.
- Simplified module structure for easy maintenance.
- Excellent performance with AVR system.
- Large fuel tank with protective bars.

#### ACCESSORIES

- Instruction manual
- Engine manual
- Engine tool kit
- Plug heads for each receptacle



SGB4001Ha

Max. Output  
3.6kVA



SGB6001Ha

Max. Output  
4.8kVA



SGB6001HSa  
(Electric start model)

Max. Output  
4.8kVA




SGB7001Ha

Max. Output  
5.5kVA



SGB7001HSa  
(Electric start model)

Max. Output  
5.5kVA

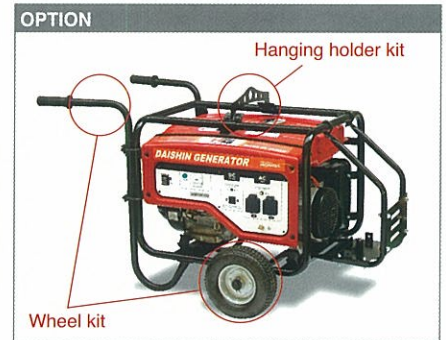

MODEL	SGA3001Ha	SGB3001Ha	SGB4001Ha	SGB6001Ha	SGB6001HSa	SGB7001Ha	SGB7001HSa
Engine	HONDA						
Engine Brand	HONDA						
Engine Model	GX160	GX160	GX240	GX340	GX340	GX390	GX390
Displacement (cm <sup>3</sup> )	163	163	242	337	337	389	389
Max. Output (kW/4000m <sup>-1</sup> )	4.0	4.0	5.9	8.1	8.1	9.6	9.6
Type	Air Cooled, 4-cycle, OHV Gasoline Engine						
Oil Alert System	N.A.	Standard					
Ignition System	Transistor (C.D.I.)						
Electric Start		N.A.			Standard	N.A.	Standard
Generator	Self-Exciting, 2-Pole, Field Rotating Type, Single Phase						
Alternator	AVR						
Voltage Regulator	Single						
Phase	Single						
AC Max. Output (kVA)	2.2	2.2	3.6	4.8	4.8	5.5	5.5
AC Rated Output (kVA)	2.0	2.0	3.0	4.0	4.0	5.0	5.0
Rated Voltage	220V 50Hz						
DC Output	N.A.	12V-8.3A (Receptacle)					
Rated Power Factor	1cos $\psi$						
Other Features	Standard						
Pilot Lamp	Standard						
Volt Meter	N.A.	Standard					
Fuel Tank Capacity (ℓ)	3.6	16			25		
Continuous Operating Hours (hr:100%Load)	3.5	14.1	15.1	10.1	10.1	9.0	9.0
Measurement	685x534x509						
Dimensions (mm/LxWxH)	545x415x405	595x414x495					
Dry Weight (kg)	35.0	45.8	69.5	78.2	81.2	82.0	85.0
20Ft container Load	270	180			128		

\*Specifications are subject to change without notice.



DAISHIN INDUSTRIES LTD.

1520-1, Funatsuke, Yoro-cho, Yoro-gun, Gifu 503-1382 Japan

Phone 81-(0)584-36-0501 FAX 81-(0)584-36-0504

URL <http://www.daishin-japan.co.jp> E-mail [overseas@daishin-japan.co.jp](mailto:overseas@daishin-japan.co.jp)

AGENT